

HYBRIDPLATTFORM UWITEC HYBRID PLATFORM UHP 30450




Umwelt- und Wissenschaftstechnik

TECHNICAL DATA

max. number of persons: 6 persons
Main dimension: 4850mm x 4517mm x 6046mm
Work surface: approx. 13,50m²
Weight UHP 30450: 1.165 kg
Max load: 3.750 kg
Materials used: Aluminium, plastic, steel and stainless steel

Range of application: 0m - 50m Drilling depth
Flowing and standing waters: 5m - 300m water depth
Opening Sampling: 1040mm x 980mm
Dimension main tank: 3025mm x 825mm x 750mm - 135kg

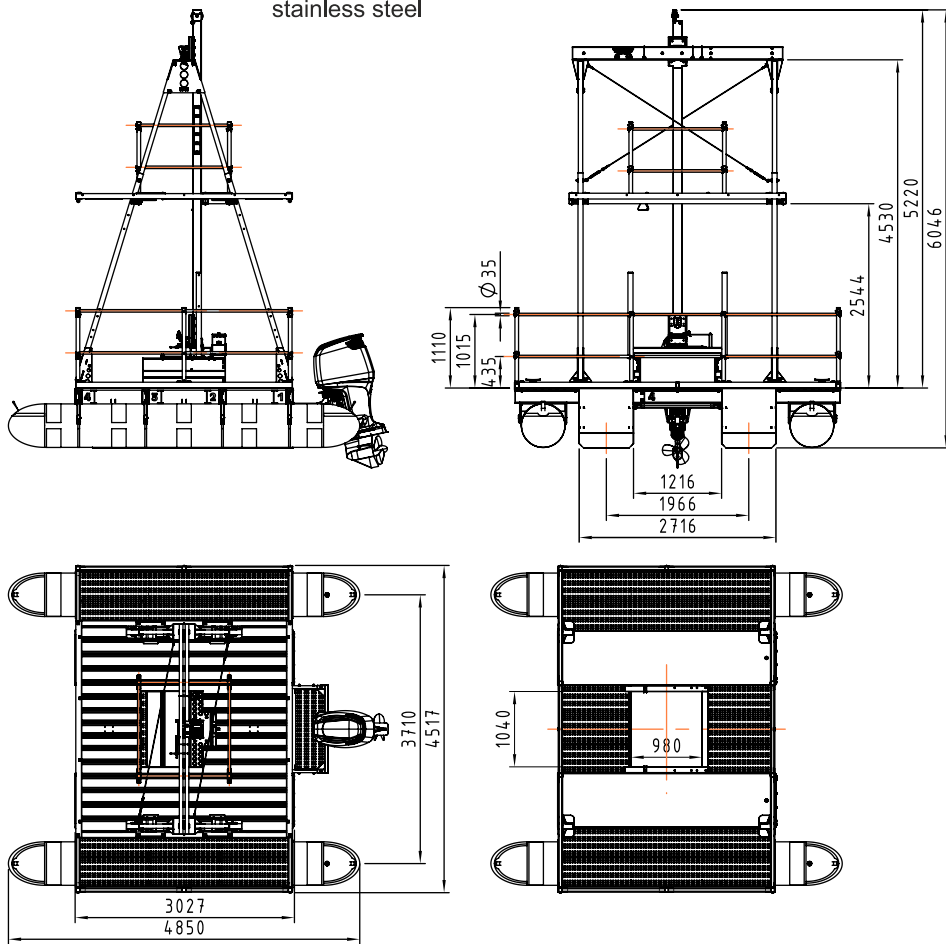

EQUIPMENT

- Base plate UBP 09090
- Drilling rig UDR 06200
- Drilling rig UDR 09200
- Cable winch medium UHW 500-K8.0
- Cable winch medium UHW 500-K10.0
- Cable winch medium UHW 500-S5.0
- Anchor winch medium UAW 500-P8.0

Equipment and optional accessories on request.

We will be happy to advise you.

OPTIONAL ACCESSORIES

- Box trailer
- Outboard motor
- various boat accessories



(Symbol images)

UWITEC GmbH
Umwelt- und Wissenschaftstechnik
Weissensteinstraße 30

The illustrations in this brochure are not the originals, as the printing colours of the paintwork cannot be reproduced as brilliantly. We reserve the right to make changes to technical data typographical errors and misprints.

Tel: +43 (0) 6232/3949-10
Fax: +43 (0) 6232/3949-30
office@uwitec.at
www.uwitec.at

HYBRIDPLATTFORM UWITEC HYBRID PLATFORM UHP 30450



Umwelt- und Wissenschaftstechnik

THE ALLROUNDER

The UHP hybrid platform by **UWITEC GmbH** is the perfect choice for deep sediment sampling on large waterbodies.

With the large supplant area in the water, the hybrid platform has an excellent floating ability and is able to withstand even large waves of up to one metre. It is possible to work on the hybrid platform with waves of up to maximum 0.50 m. This stability in the water, in turn, enables long sediment sampling lengths (up to 50 metres with a water depth of max. 300m) which can be removed in 2 m segments.

*The record at **UWITEC GmbH** is 54m.*

Transport to the world's most remote places and lakes is made easier thanks to the optimal vehicle trailer.

Similar to all other equipment by **UWITEC GmbH**, the assembly and handling of the platform has been developed and manufactured with the goal of ease of use to enable best results in the shortest possible time.

This is all complemented by a comfortable roof, generous work area and the compatibility of all **UWITEC GmbH** boring and sampling devices with this platform.

All in all, the **all-rounder** among the **UWITEC** platforms.

PRODUCT-FEATURES

- Usage in very deep water possible
- Easy assembly
- Easy transport also in difficult terrain thanks to optional vehicle trailer
- Also suitable for use with all **UWITEC GmbH** boring systems
- Extensive work area
- Easy to use
- Very stable floating capacity
- Roof for comfortable working

AREAS OF USE

- Ø300 m water depth (also deeper although no liability assumed)
- Flowing and stagnant waterbodies



UWITEC GmbH
Umwelt- und Wissenschaftstechnik
Weißensteinstraße 30

The illustrations in this brochure are not the originals, as the printing colours of the paintwork cannot be reproduced as brilliantly. We reserve the right to make changes to technical data typographical errors and misprints.

Tel: +43 (0) 6232/3949-10
Fax: +43 (0) 6232/3949-30
office@uwitec.at
www.uwitec.at